

ELAR EXTQW FLOOD HP™

SKU# ELA973




Photometric Data

Specifications and improvements in the design of this unit are subject to change without any prior written notice.

RED LEDs	196 FC / 2110 LUX	76 FC / 822 LUX	37 FC / 398 LUX	22 FC / 237 LUX	14 FC / 153 LUX
GREEN LEDs	221 FC / 2380 LUX	884 FC / 884 LUX	39 FC / 421 LUX	22 FC / 240 LUX	14 FC / 155 LUX
BLUE LEDs	230 FC / 2480 LUX	91 FC / 981 LUX	42 FC / 455 LUX	25 FC / 269 LUX	16 FC / 168 LUX
WHITE LEDs	305 FC / 3280 LUX	116 FC / 1244 LUX	55 FC / 592 LUX	33 FC / 350 LUX	20 FC / 217 LUX
FULL ON	920 FC / 9900 LUX	342 FC / 3680 LUX	161 FC / 1736 LUX	94 FC / 1009 LUX	61 FC / 653 LUX

LUX x 0.0929 = FC

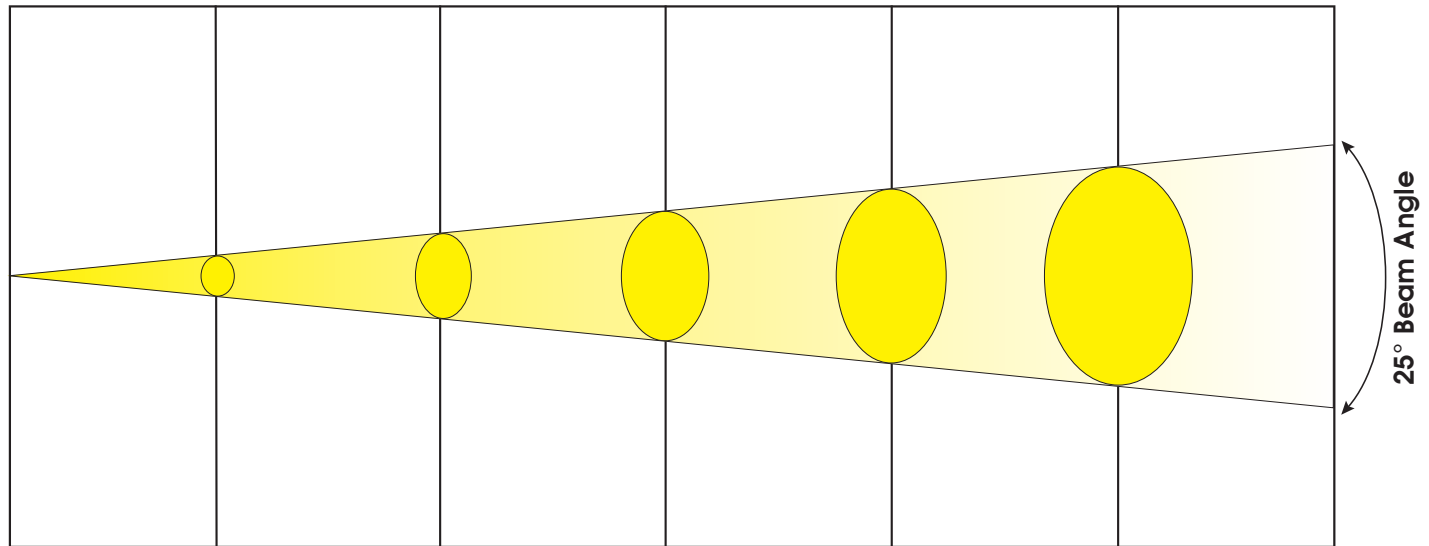

0 m	1 m	2 m	3 m	4 m	5 m
0 ft	3.3 ft	6.6 ft	9.8 ft	13.1 ft	16.4 ft

Min Beam Diameter

25° Beam Angle	Ø 1.25 m / Ø 4.1 ft	Ø 1.35 m / Ø 4.4 ft	Ø 1.50 m / Ø 4.9 ft	Ø 1.65 m / Ø 5.4 ft	Ø 1.80 m / Ø 5.9 ft
----------------	---------------------	---------------------	---------------------	---------------------	---------------------

ELATION | ELAR EXTQW FLOOD HP™ | Photometric Data

Elation Professional USA - Corporate Headquarters | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional Florida | 13185 NW 47th Ave. | Miami Gardens, FL. 33054

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands

+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu