

# TVL1000 II™

SKU# TVL613




## Photometric Data

Specifications are subject to change without any prior written notice.

WARM WHITE (3200K)	111 FC / 1200 LUX	32 FC / 340 LUX	15 FC / 160 LUX	9 FC / 95 LUX	6 FC / 66 LUX
COOL WHITE (6500K)	143 FC / 1540 LUX	39 FC / 420 LUX	19 FC / 200 LUX	11 FC / 116 LUX	10 FC / 110 LUX
FULL ON (4500-5000K)	204 FC / 2200 LUX	56 FC / 600 LUX	25 FC / 270 LUX	15 FC / 160 LUX	8 FC / 85 LUX

LUX x 0.0929 = FC

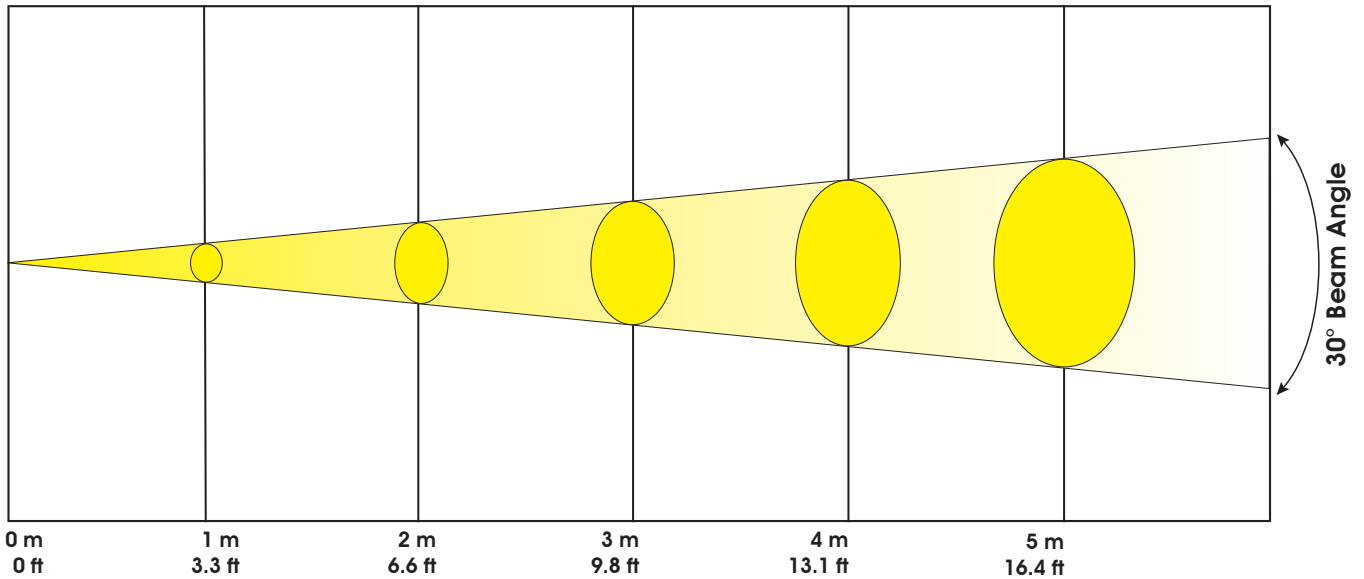

30° Beam Angle	Ø 0.5 m / Ø 1.6 ft	Ø 1.0 m / Ø 3.3 ft	Ø 1.6 m / Ø 5.2 ft	Ø 2.1 m / Ø 6.9 ft	Ø 2.6 m / Ø 8.5 ft
----------------	--------------------	--------------------	--------------------	--------------------	--------------------

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu