

# CAV118


## SVGA male to 5x BNC male

CAV118 is a high quality SVGA cable with on one side a male VGA connector and on the other side 5 male BNC connectors. Other pins of the VGA connector are not connected (No DDC and EDID). The cable has triple shielding and a ferrit core at the VGA connector which means that it can be used in noisy environments. The VGA connector is gold plated to increase connectivity.



| Structure                        |                                                                                                   |
|----------------------------------|---------------------------------------------------------------------------------------------------|
| Type of cable                    | VGA cable                                                                                         |
| Coaxial Characteristic Impedance | 75 Ohm                                                                                            |
| Coaxial Conductor                | BARE COPPER 7 wires / Ø 0.12 mm                                                                   |
| Coaxial Insulation               | *FPE, White, Ø 1.7 mm                                                                             |
| Coaxial Shield                   | BARE COPPER SPIRAL 54 wires / Ø 0.12 mm                                                           |
| Coaxial Jacket                   | 105° PVC,<br>Red,Blue,Black,Green,White                                                           |
| Overall Shield                   | Shield 1:  ALUMINUM FOIL<br>Shield 2:  TINNED COPPER BRAIDING<br>16 bundels / 7 wires / Ø 0.12 mm |
| Filler                           | PP filler                                                                                         |
| Jacket                           | PVC Black                                                                                         |
| BNC connectors                   | Nickel Plated Brass                                                                               |
| VGA connectors                   | GOLD PLATED CONNECTIONS                                                                           |
| American Wire Gauge              | 28 AWG                                                                                            |
| Jacket Outer Diameter            | Ø 11 mm                                                                                           |

### Attenuation 30 m cable

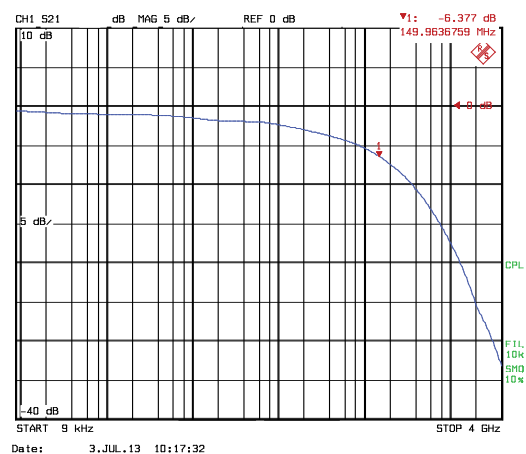

### Available Lengths:

|                        |                      |
|------------------------|----------------------|
| CAV118/1.5 - 1.5 METER | CAV118/10 - 10 METER |
| CAV118/3 - 3 METER     | CAV118/15 - 15 METER |
| CAV118/5 - 5 METER     | CAV118/20 - 20 METER |

### Max Tested Resolution

|                |       |
|----------------|-------|
| Below 5 meter  | 1080p |
| Below 10 meter | 1080p |
| Below 15 meter | 1080p |
| Below 20 meter | 1080p |

### Cross Section



### Procab Reference Series



Procab Reference series consist of high quality cables that can be used in all kinds of applications in the audio and video world. Professionals like to work with the reference serie because it has a life long guarantee.



Go to the product in our webshop for more information about the technical details of this product

Procab reserves the right to change specifications without notice, this is part of our policy to continually improve our products.

[www.procab.be](http://www.procab.be)